

MVR-606-2IP

6CH Hybrid Mobile Digital Video Recorder

www.vipro.com.tw



Ultra-reliable HD hybrid performance coupled with everything you need for Mobile Video Security Management.

MVR-606-2IP is an advanced 6CH Hybrid Mobile Digital Video Recorder specially tailor-made for remote vehicle video surveillance solution. Incorporating embedded Linux O/S, high-speed processor and the latest H.264 video compression technology, MVR-606-2IP features built-in G-sensor, GPS positioning, Geo-fence alarm, 3G/4G cellular network connectivity, vehicle travel information recording and wireless data upload. With center software it also achieves alarm linkage central monitoring, remote management and playback analysis. Its modular and rugged design allows flexible installation and easy maintenance while ensures high reliability in harsh vehicle surveillance environment.


Key Features

- 4CH WD1 + 2CH 720P IP in real time
- Rugged metal and modular design
- Excellent vibration performance
- 2.5" HDD storage and SD card mirror record
- Dual streams for local recording and wireless transmission
- GPS* for location tracking and Geo-fence
- 3G/4G* for live view and remote management
- WIFI automatic file download
- Power-off & surge protection, wide voltage input
- Durable in harsh temperature (-40°C~+70°C)

(*) Optional functions

Dimensions

(unit: mm)

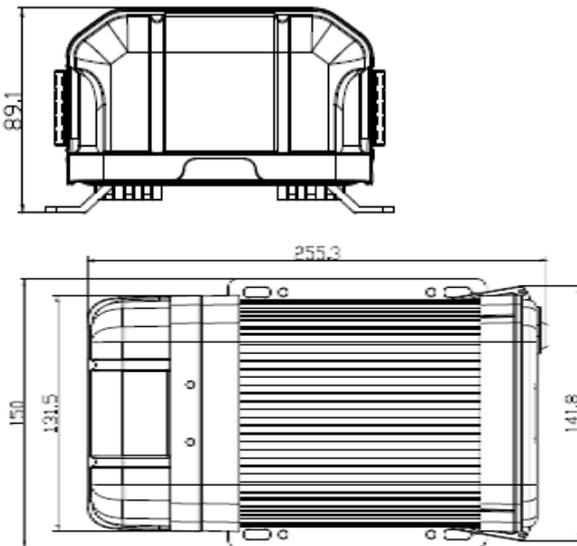

Standard Accessories

Vehicle fuses (7.5A & 15A) x 2

MDVR key x 1



9 pin aviation power input wire x 1



Technical Specifications

| Product series | MVR-606-2IP | |
|----------------|--|--|
| Overview | Preview, Record, Playback, Network, Locate | |
| System | OS | Linux 3.0.8 |
| | Control Mode | Mouse, Network, Easy Check, CP4 |
| | Input | 4 channels WD1 + 2 channels 720P |
| Video | Output | 1 channel |
| | Total Resource | 100/120fps @ WD1 + 60fps @ 720P |
| | Video Signal Standard | Electrical level: 1Vpp Impedance : 75Ω NTSC/PAL Optional |
| Audio | Input | 6 channels (incl. IPC x 2) |
| | Output | 1 channel |
| | Audio Signal Standard | Electrical level: 2Vpp Input impedance: 4.7kΩ |
| Display | Display Split | 1/4/9 |
| | OSD | GPS information, alarm, vehicle number, speed, date/time |
| | Operation | Semi-transparent GUI |
| Recording | Video/Audio Compression | Video: H.264 Audio:ADPCM, G.711A, G.711U |
| | Image Resolution | Analog: PAL:WD1(928x576),WHD1(928x288),WCIF(464x288), D1(704x576),HD1(704x288), CIF(352x288) NTSC:WD1(928x480),WHD1(928x240),WCIF(464x240), D1(704x480),HD1(704x240), CIF(352x240) Digital:720P(1280x720) |
| | Image Quality | 1~8 levels adjustable (1 is the best) |
| Playback | Record Mode | Boot up/Manual/schedule/Alarm (sensor trigger, speed, acceleration, video loss, temperature) |
| | Pre-recording | 0 ~ 60 minutes |
| | Post-recording | 0 ~ 30 minutes |
| Network | Mirror/Dual Recording | Yes |
| | Playback Channel | 1 channel by local playback |
| | Search Mode | Date/time, channel, event |
| Locating | Ethernet | RJ45 port (100M) x1 |
| | IPC Ethernet | 6-pin DJ (100M x 2, PON power supply) |
| | WIFI | 802.11b/g/n (optional) |
| Storage | 3G/4G | EVDO/WCDMA/TDD-LTE/FDD-LTE (single module supported) (optional) |
| | GPS | location tracking, speed detection and sync time |
| | Hard Disk | 2.5" SATA HDD x 1 (up to 2TB) |
| Interface | USB | USB 2.0 x 2 (1 for mirror record, 1 for easy check) |
| | SD | SD x 1 |
| | RS232/RS485 | RS232 x 2 / RS485 x 2 |
| Electrical | Sensor | 8 inputs, 2 outputs |
| | Serial | G-sensor (internal) |
| | Speed | 1 channel pulse speed detection |
| Mechanical | Panel | CP4 (The multi-functional panel) optional |
| | Input | DC8~36V |
| | Output | 12V@1A, 5V@1A |
| Environmental | Dimension | 255.3 x 150 x 89.1mm / 10.05" x 5.906" x 3.508" |
| | Weight | 2.2kg / 4.85lbs |
| | Operating Temperature | -40°C~+70°C / -40°F~+158°F (with heater) -10°C~+70°C / -14°F~+158°F @ RH 8%~90% |
| Others | Waterproof | IP54 |
| PC Software | | VMS 2.0 |
| Certifications | EU / USA | CE, FCC |

MVR-606-2IP

6CH Hybrid Mobile Digital Video Recorder

www.vipro.com.tw

Optional Accessories

GPS Module and Antenna

GPS data can be recorded into MDVR video files for playback and reported to CMS for real time vehicle positioning.



6-Axis Sensor (G-force Sensor)

Determine a vehicle sharp turns, braking, intense bumps, rollover, fast changing lanes, S deformation tract and other bad driving habits by the detecting module and correct these bad behaviors via management system.



3G/4G Module and Antenna

Realize 3G/4G cellular network connectivity for Mobile DVR for live remote video streaming and alarm notification.



CP4 Control Panel

The multi-functional Control Panel used for Bus Dispatch System, featuring built-in amplifier, RFID, 7 inch LCD, station announcement.



WIFI Module and Antenna

Multi-channel wireless network device applied for Mobile DVR on video download and data transfer.



LED Display Panel

Designed for easier checking of Mobile DVR working status. Any of the LED flash will indicate the corresponding status.



4Pin Male-Female Din-jack Cable

Din-aviation cables are used for MDVR installation in the vehicle. 4 pins (video/audio/ground/power) can provide the power for cameras. Available in different lengths (1.5m,3m,5m,7m,9m,11m,13m,15m,20m or customized) to suit all kinds of vehicle installation.



Easy Check

A device management software running on Android tablet, allowing user to manage the MDVR conveniently via the software in WIFI environment, thus improving working and maintenance efficiency.



Serial Connection Box

Integrate the interface of RS-232 and RS485 to realize the serial communication between external device and MDVR.



HDD Reader

For playback recorded footage on PC



Serial Alarm Cable



6pin Aviation head to RJ45 Cable



UPS (Uninterrupted Power Supply)

A high-performance back-up power solution, using internal electronic circuit to measure, calculate and storage battery data, which makes the use and management of power supply more predictable.



Fireproof Box


Specially designed for anti-fire and anti-explosion to protect the video files in the last minutes of the accidents with built-in 32GB memory.




MVR-606-2IP

6CH Hybrid Mobile Digital Video Recorder

System Diagram

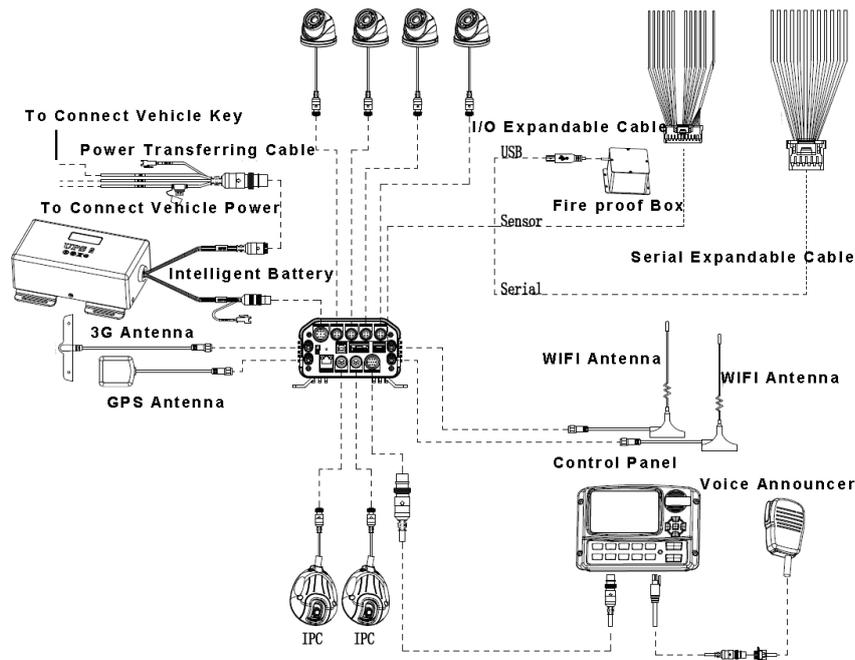


Front Panel

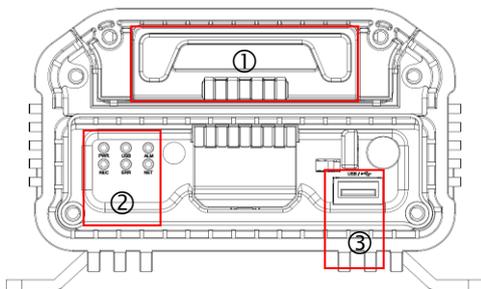

1. HDD module 2. Status LED 3. USB port

- PWR Power indicator lamp: Blue
- ALM Alarm indicator lamp: Red when alarm triggered, or light off.
- REC Record indicator lamp: Green when HDD or SD is recording.
- ERR Error indicator lamp: Red when hard disk works abnormally.
- NET Network indicator lamp: Green when there is 3G/4G module, otherwise, it is light off. It flashes when there is network.

Rear Panel

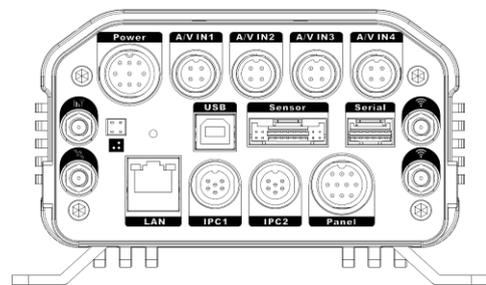

- | | |
|--------------------|--|
| 1. Power | DC 8-36 V Power Input |
| 2. Sensor & Serial | The Interfaces of Serial Port and Switch |
| 3. A/V IN 1~4 | Analog Audio & Video Input 1-4 |
| 4. IPC1~2 | PON Power Supply IP1~2 |
| 5. | GPS/BD Antenna Interface |
| 6. | 3G/4G Antenna Interface |
| 7. | WiFi Antenna Interface |
| 8. USB | USB 2.0 Interface |
| 9. LAN | Network Interface |
| 10. Panel | Control Panel Interface (CP4) |

SATA HDD Support List

| Brand | Model | Capacity |
|-----------------|------------|----------|
| Western Digital | WD5000LUCT | 500G |
| | WD3200BUCT | 320G |
| | WD10JUCT | 1TB |
| | WD10SPCX | 1TB |
| | WD3200LPVX | 320G |
| | WD3200BPVT | 320G |
| Toshiba | MQ01ABF032 | 320G |
| | MQ01ABF050 | 500G |
| | MQ01ABD100 | 1TB |

*The above are recommended, but most SATA HDDs should work with 2TB max.

| Brand | Model | Capacity |
|-------------|---------------------|----------|
| Samsung | ST1000LM024 | 1TB |
| | ST500LM012 | 500G |
| | ST320LM001 | 320G |
| | ST2000LM003 | 2TB |
| | HN-500MBB | 500G |
| | HN-M101MBB | 1TB |
| Samsung SSD | MZ-7WD480HCGM-00003 | 480G |
| | MZ7WD480HAGM-000H3 | 480G |
| Seagate | ST500LT012 | 500G |
| | ST500VT000 | 500G |

MVR-606-2IP

6CH Hybrid Mobile Digital Video Recorder

Storage Capacity Calculation

① Image Quality and Stream

| Resolution | Image quality | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|------------------|---------------|------|------|------|------|------|------|------|-----|
| Stream (Kbps) | 720P | 6144 | 4800 | 4128 | 3456 | 2784 | 2112 | 1440 | 768 |
| | WD1 | 2662 | 1997 | 1599 | 1331 | 1170 | 1040 | 936 | 832 |
| | WHD1 | 1664 | 1248 | 998 | 832 | 728 | 650 | 585 | 520 |
| | WCIF | 1040 | 780 | 624 | 520 | 455 | 405 | 364 | 325 |
| | D1 | 2048 | 1536 | 1230 | 1024 | 900 | 800 | 720 | 640 |
| | HD1 | 1280 | 960 | 768 | 640 | 560 | 500 | 450 | 400 |
| | CIF | 800 | 600 | 480 | 400 | 350 | 312 | 280 | 250 |

② Record File Size Calculation

Each channel record file size:

Recording time (s) x Stream (Kbps) / 8 / 1024 = File Size (MB)

For instance, the file size of the image 1 at D1 resolution within 1 hour:

$3600 \times 2048 \text{ Kbps} / 8 / 1024 = 900 \text{ MB}$

③ Image Quality and Resolution

| Resolution | Image quality | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|----------------|---------------|------|------|------|------|------|-----|-----|-----|
| Record (MB) | 720P | 2700 | 2109 | 1814 | 1518 | 1223 | 928 | 632 | 337 |
| | WD1 | 1170 | 878 | 702 | 585 | 514 | 456 | 411 | 365 |
| | WHD1 | 731 | 549 | 438 | 365 | 320 | 285 | 257 | 229 |
| | WCIF | 456 | 343 | 274 | 229 | 199 | 178 | 160 | 143 |
| | D1 | 900 | 675 | 540 | 450 | 395 | 351 | 316 | 281 |
| | HD1 | 562 | 422 | 337 | 281 | 246 | 219 | 198 | 176 |
| | CIF | 351 | 264 | 211 | 176 | 153 | 137 | 123 | 110 |