

TM720Q

7" Color TFT LCD Quad Monitor with Touch Screen

www.vipro.com.tw




- ✓ *Single, dual, triple, quad image and PIP functions*
- ✓ *1 DVD/AV input and 4 camera inputs with configurable camera name*
- ✓ *Auto scanning and timed image switch*
- ✓ *Four trigger wires for cameras*
- ✓ *Applicable to both indoor/outdoor security systems and vehicle rear view systems*
- ✓ *Wide power supply: 10V~32V*

Key Features

- Single, dual, triple, quad, trefoil, Y-split image and PIP functions
- 1 DVD/AV input and 4 camera inputs with configurable camera name (max. 8 characters)
- Display effect, volume and mirror function for each camera can be individually setup.
- Priority of quad picture and dual picture configurable
- With trigger wire for dual picture, the relative cameras can be combined optionally.
- The boot-strap display can be set as preferred display mode.
- Four trigger wires for cameras
- Once a trigger wire is activated, image automatically switches to its relative camera.
- Auto scanning and timed image switch
- Image of monitor auto switches to the working channel
- Backup distance grid & left / right-turning indicator arrow available
- Applicable to both indoor / outdoor security systems and vehicle rear view systems
- Power output from the monitor: 4X300mA
- Wide power supply: 10V~32V
- New style with multiple functions; easy installation and convenient operation

Dimensions

(unit: mm)

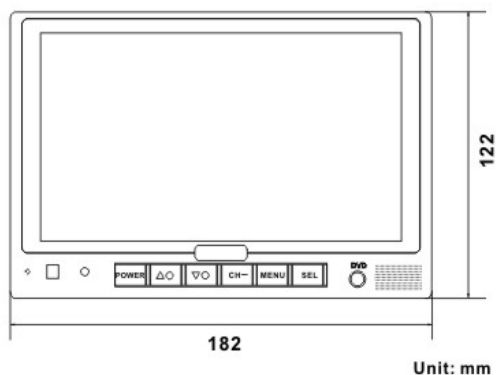

Unit: mm

Technical Specifications

Product series	7" TFT LCD Quad Monitor with Touch Screen
Model	TM720Q
TV system	NTSC/PAL
Resolution	800x3 (RGB) x 480
Dot pitch	0.0642 (W) x 0.1790 (H)
Contrast	500:1
Brightness	400cd/m ²
Aspect ratio	16:9
Viewing angle	U: 50° / D: 70°, R/L: 70°/70°
Video inputs	4 video inputs for cameras; peak value: 1Vp-p, impedance: 75ohm
Video output	1 REC video output; peak value: 1Vp-p, impedance: 75ohm
Live Video output	peak value: 1Vp-p, impedance: 75ohm
DVD input	peak value: 1Vp-p, impedance: 75ohm
Audio inputs	4 audio inputs for cameras; peak value: 1Vp-p, impedance: 4.7K ohm
Audio outputs	1 Live audio output; peak value: 1Vp-p, impedance: 4.7K ohm
AUX input	peak value: 1Vp-p, impedance: 4.7K ohm
DVD audio input	peak value: 1Vp-p, impedance: 4.7K ohm
Loudspeaker	One 15x24 mm round loudspeaker
Touch screen specification	transmittance 80%
Operation pressure	10~110g
Response time	<10ms
Outer dimension (W x H x T)	194.6 x 128 x 39.3mm / 7.661" x 5.039" x 1.547"
Power supply	Automobile storage battery (10-32V)
Power consumption	Max. 25W
Power for cameras	Max. 4x300mA, 12V
Operating temperature	-20°C~ 70°C/ -4°F~158°F
Storage temperature	-30°C~80°C/ -22°F~176°F
Relative Humidity	RH90%
Certifications	CE

Accessories (*: optional and excluded from standard package)

Sun shield



AV & power supply conversion cable (13Pin)



AV & power supply conversion cable (22Pin)



Angle Adjustment screw



Remote control



U-support bracket*



Base support*



User's manual

Manual