

D57

Mini Dome Camera




Key Features

- Metal Mini dome housing with fixed lens
- IP66 Water-proof & Vandal-proof
- Compact function for Shutter/Auto; BLC/Auto, AGC/Auto
- Dual Glass In Anti-reflection Design
- Lens Optional: 2.8/3.6/6.0mm for options
- Resolution: 600TVL/700TVL
- 12pcs leds, Night vision range 10m
- Easy installation on ceiling or wall, surface or flush mount
- Low power consumption

Dimension

(unit: mm)

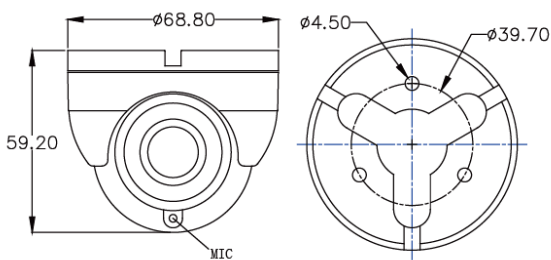

Package contains

- Camera x 1
- Instruction manual x 1
- Mounting screw x 3

D57 is the Mini Metal Dome Camera specially designed for public bus, school bus, passenger transport. The special structure (easy assembly and disassembly, lockable angle, anti-vibration), the advantages of anti-interference, low power consumption, and 12 IR Infrared LED for superior night vision make this dome camera ideal for vehicle surveillance.

Technical Specifications

Product series	Indoor Dome Camera
Model	D57
Imaging Device	1/3" Color SONY CCD
TV System	NTSC/PAL
Effective Pixels (PAL/NTSC)	752(H) x 582(V) / 768(H) x 494(V)
Horizontal Resolution	600 TV lines
Minimum Illumination	0 Lux at F1.2 (Infrared LED on)
Scanning System	2:1 Interla13
Synchronization	Internal
S/N Ratio	≥ 50 dB (AGC off)
Auto Gain Control	Auto
White Balance	Auto
Electronic Shutter	Auto
Back Light Compensation	Auto
IR LED	12 LEDs with 850nm
IR night vision	10 meter
Video Output	1 Vp-p, 75Ω Composite, BNC x 1
Audio	Optional
Mirror	Optional
Gamma Ratio	0.45
Lens	f2.8mm/3.6mm/6.0mm
Lens Mount	M12XP0.5mm Thread
View of Angle (D)	90°
Pan Adjusting	+/- 180°
Tilt Adjusting	0° ~ 90°
Input Voltage / Current	12V DC ±10%
Power Consumption	130mA
Dimensions (W x H)	ø 68.8 x 59.2 mm / ø 2.709" x 2.331"
Net Weight	180g / 0.3968lbs
Weatherproof	IP66
Working Temperature	-25°C ~ +65°C / -13°F ~ +149°F
Working Humidity	RH90% Max.
Certification	N/A